Quartet Anywhere 4' x 3' Repositionable Dry-Erase Surface Sheet - R85543

Instruction Manual




Call Us at 1-800-944-4573

Quartet[®] Anywhere[™] Repositionable Dry-Erase Surface

Installation and Usage Instructions

Recommended Surfaces:


Painted drywall, glass, painted steel, finished wood, whiteboards, chalkboards and stone.

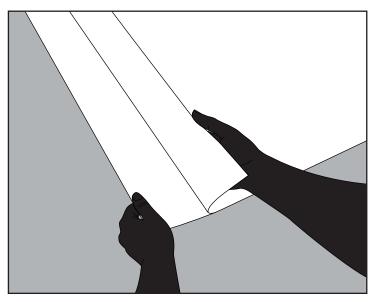


Step 1: Begin by removing a portion of the dry-erase surface from the paper backer.

Surface Preparation:


Clean and allow surface to fully dry prior to application. Ensure surface is smooth and free of dust, chipped paint, or other imperfections.

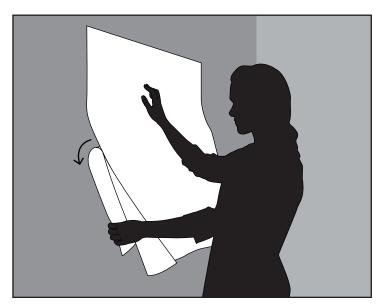

Step 2: Apply each of the top corners to the surface you are trying to cover. Check that the product is level and aligned correctly. Simultaneously, smooth out surface as adhesive backer is pulled away.

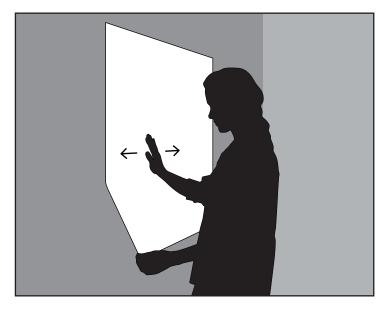

Step 3: Slowly press the adhesive against the wall or other surface, working any air bubbles to the nearest edge.





Helpful Tip: Any remaining bubbles can be removed by peeling nearest edge of dry-erase surface past bubble and slowly reapplying.



MyBinding.com 5500 NE Moore Court Hillsboro, OR 97124 Toll Free: 1-800-944-4573

Local: 503-640-5920

