

Polar®

Choice 3 White

Polar® Choice 3 White is the ideal choice for a printable monomeric PVC film. Available with a gloss or matte finish and permanent gray adhesive, Polar® Choice 3 White maximizes adhesive performance on a wide variety of substrates.

Polar® Choice White is outdoor durable for up to 3 years and is ideal for signage and general advertising applications, including windows, POP displays, stickers and decals.

- IDEAL FOR INDOOR & OUTDOOR GENERAL SIGNAGE & DISPLAY
- WINDOW & WALL GRAPHICS
- SUITABLE FOR MANY APPLICATIONS

Product Codes:

CTMPB - Polar Choice 3 White Matte PB

CTGPB - Polar Choice 3 White Gloss PB

3.2
mil

White
Monomeric
PVC

Matte or
Gloss



(Eco) Solvent
Latex
UV



Grey
Permanent
Acrylic Solvent Adhesive




Widths up to 54 in



3 YEARS DURABILITY
INTERIOR & EXTERIOR

THE CHOICE FOR MONOMERIC PVC

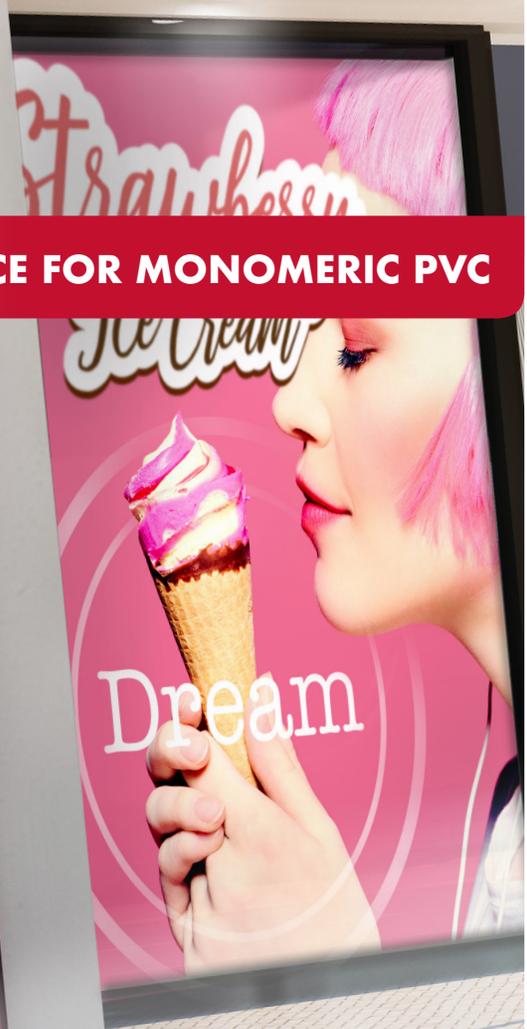

APPLICATIONS

GENERAL SIGNAGE

WINDOW GRAPHICS

EXHIBITION GRAPHICS

POS DISPLAY



DRYTAC®

ADHESIVE SCIENCE

MyBinding
When Image Matters.

mybinding.com
1-800-944-4573

Polar®

Choice 3 White

Polar® Choice 3 White films are 3.2 mil (80µ) gloss or matte white monomeric PVC films, coated on one side with a permanent pressure sensitive gray solvent acrylic adhesive that is protected by a 140gsm 2 side PE coated release liner. Suitable for interior and exterior use (up to 3 years).

CTMPB - Polar Choice 3 White Matte PB
White Matte Film with Permanent Gray Adhesive

CTGPB - Polar Choice 3 White Gloss PB
White Gloss Film with Permanent Gray Adhesive

- IDEAL FOR GENERAL SIGNAGE & GRAPHIC PROMOTIONS
- SUITABLE FOR INTERIOR AND EXTERIOR USE
- CAN BE APPLIED TO MANY SMOOTH SURFACES

INSTALLATION RECOMMENDATION

The surface must be clean and smooth and free of defects before application.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2023 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	White Gloss or Matte Monomeric PVC
Adhesive	Gray Permanent Solvent Acrylic (Pressure Sensitive)
Release Liner	140 gsm 2 Side PE Coated, 1 Side Siliconized White Kraft

PRODUCT CHARACTERISTIC

Film Thickness	3.2 mil (80µ) 4.2 mil (105µ)
Adhesive Layer	1 mil (25µ) (105µ)
Outdoor Durability	3 Years
Application Temperature	>41°F (5°C)
Service Temperature Range	-4°F to 149°F (-20°C to 65°C)
Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

OVERLAMINATE RECOMMENDATIONS

When using Polar® Choice, an overlamine can be used for maximum life expectancy. Products recommended for use with Polar® Choice are Drytac's Dynamic™ Plus, Interlam™ Pro or Protac™ overlaminates.

DRYTAC®

ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

MyBinding
When Image Matters.

mybinding.com
1-800-944-4573