

Triumph 4315 16.875" ***Semi-Automatic*** ***Tabletop Paper Cutter***

Product Spec Sheet



Provided by

MyBinding.com
When Image Matters.

Call Us at 1-800-944-4573

TRIUMPH® 4315

Dependable semi-automatic tabletop cutter with electric blade drive, manual fast-action clamp, and EASY CUT blade activation.

Cutting width, inches 16 7/8

Cutting height, inches 1 1/2

Narrow cut, inches 1 3/8

Length behind blade, inches 17



optional stand



optional cabinet



Comprehensive SCS safety package: patented EASY CUT electronic blade activation bars for true two-hand operation; transparent, electronically controlled front safety guard; transparent safety cover on rear table; main switch and safety lock with key; 24 volt controls (low voltage); patented IDEAL safety drive; automatic blade return from every position; disc brake for instant blade stop; blade changing device covers cutting edge of blade; blade depth adjustment from outside of machine; blade and cutting stick can be changed without removing covers.

Electric blade drive. Spindle-guided back gauge with calibrated crank. Front table digital display (cm or inches) for precise back gauge positioning. Bright, LED optical cutting line. Patented lever-activated, fast-action clamp. Precision side guide. High quality, German steel blade. Solid steel blade carrier and adjustable blade guides. All-metal construction. Optional stand, or cabinet with storage shelves.

Specifications

Electrical requirements	115 V, 60 Hz
Motor output, horsepower	3/5
Dimensions (D x W x H), inches	34 1/4 x 25 x 14 ¹
Shipping weight, pounds	191 ²

¹height with stand is 42 3/4 inches, height with cabinet is 42 1/2 inches

²shipping weight with stand is 217 pounds, shipping weight with cabinet is 286 pounds

MyBinding.com
5500 NE Moore Court
Hillsboro, OR 97124
Toll Free: 1-800-944-4573
Local: 503-640-5920

TRIUMPH® 4315

Features



TRANSPARENT SAFETY GUARD

A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.



BACK GAUGE HAND CRANK

The calibrated hand crank is used to set the spindle-guided back gauge.




EASY CUT BLADE ACTIVATION BARS

Patented EASY CUT blade activation bars ensure true, two-hand operation.



DIGITAL DISPLAY

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.

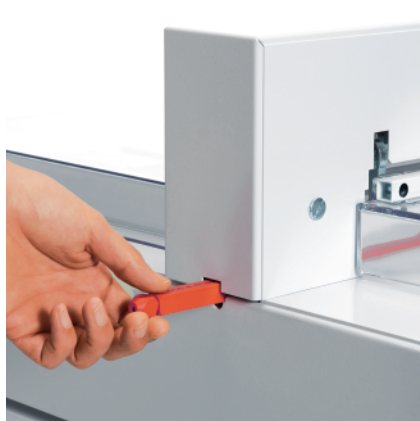

EASY CUTTING STICK CHANGE

Cutting sticks can be turned or changed easily from the outside of the machine—no tools are required.



PATENTED FAST-ACTION CLAMP

After inserting the paper stack, throw the lever on the fast-action clamp to tighten—then cut.



MyBinding.com
5500 NE Moore Court
Hillsboro, OR 97124
Toll Free: 1-800-944-4573
Local: 503-640-5920

All technical data is approximate and subject to change. © MBM Corporation, 3/2014.