

SealerSales CS-19520
Semi-Automatic Uniform Carton Sealer
w/ Top and Bottom Drive Belts

Product Spec Sheet



Provided by

MyBinding.com

When Image Matters.

Call Us at 1-800-944-4573

Excellent for wider, taller, heavier boxes



*Shown with optional infeed and discharge roller conveyors and casters

The CS-19520 Semi-Automatic Uniform Carton Sealer with Easy Manual Carton Size Adjustment has a 4-belt design (2 top and 2 bottom) and features our new tape head with “Easy Thread Design.” The machine comes complete with adjustable height legs, power cord and plug.


The operator simply folds the top flaps of the corrugated carton and feeds it into the machine. The CS-19520 applies a single tape to both the top and bottom of the case simultaneously. The CS-10520 can be easily adjusted in only seconds to process a different size carton. Excellent for wider, taller, heavier boxes.

Standard Features:

- Tape Head with “Easy Thread” Design
- Interchangeable Tape Heads
- Side Pressure Rollers to Close Box Top
- 2 Top & 2 Bottom Drive Belts for Positive Feed
- Fully Adjustable Legs From 28” – 32”


Optional Features:

- 3” (72mm) Tape Heads
- Infeed Conveyor
- Exit Conveyor
- Stainless Steel Frame
- Heavy Duty Locking Casters
- Spare Parts Kit

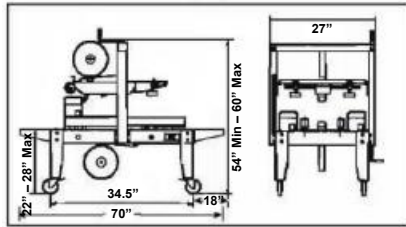SPECIFICATIONS	
CARTON SIZE	
LENGTH:	6" TO INFINITE
WIDTH:	7" MIN TO 19.5" MAX
HEIGHT:	4.5" MIN TO 20" MAX
MACHINE SIZE:	34.5"L X 27"L X 53"H
	
MACHINE SPEED:	75FT./MIN UP TO 2,000 CARTONS PER HOUR PRODUCTION RATE DEPENDS ON CARTON SIZE AND OPERATOR DEXTERITY
ELECTRICAL:	110V, 1 PHASE, 10 AMP
WEIGHT:	320-LBS (SHIPPING WEIGHT: 370-LBS)
MAX BOX WEIGHT:	65-LBS
TAPE HEAD SPECS:	2" (48MM) WIDE – 1,000 YARD OR 1,500 YARD ROLLS

TOP & BOTTOM DRIVE BELT ADJUSTABLE CARTON SEALER

Model: CS-19520



Patented "Easy Thread" Tape Design with Adjustable Box Side Guides



Heavy Duty Top and Bottom 4 Drive Belt System for Positive Grip Pressure



New Tape Head Features an Easy Thread Design with Optimizer Arm

Height Adjustment Crank

Dual Drive Motors

Spring Loaded Inner Mast Assembly

Allows Tape Head to Float for Oversized Boxes

Top & Bottom Drive Belt Assemblies

- 4 Belt Design
- Belt Speed (75FPM)
- (2) ¼ HP Motors

Panel Mounted On/Off Switch

Graduated Inner Legs

For Easy Bed Height Adjustment

Width Adjustment Knob


Adjustable Friction Brake Tape Drum

Patented Tape Head w/ Optimizer Roller

Top Flap Compression Rollers

Optional Infeed / Exit Conveyors

Optional Casters Locking / Swivel

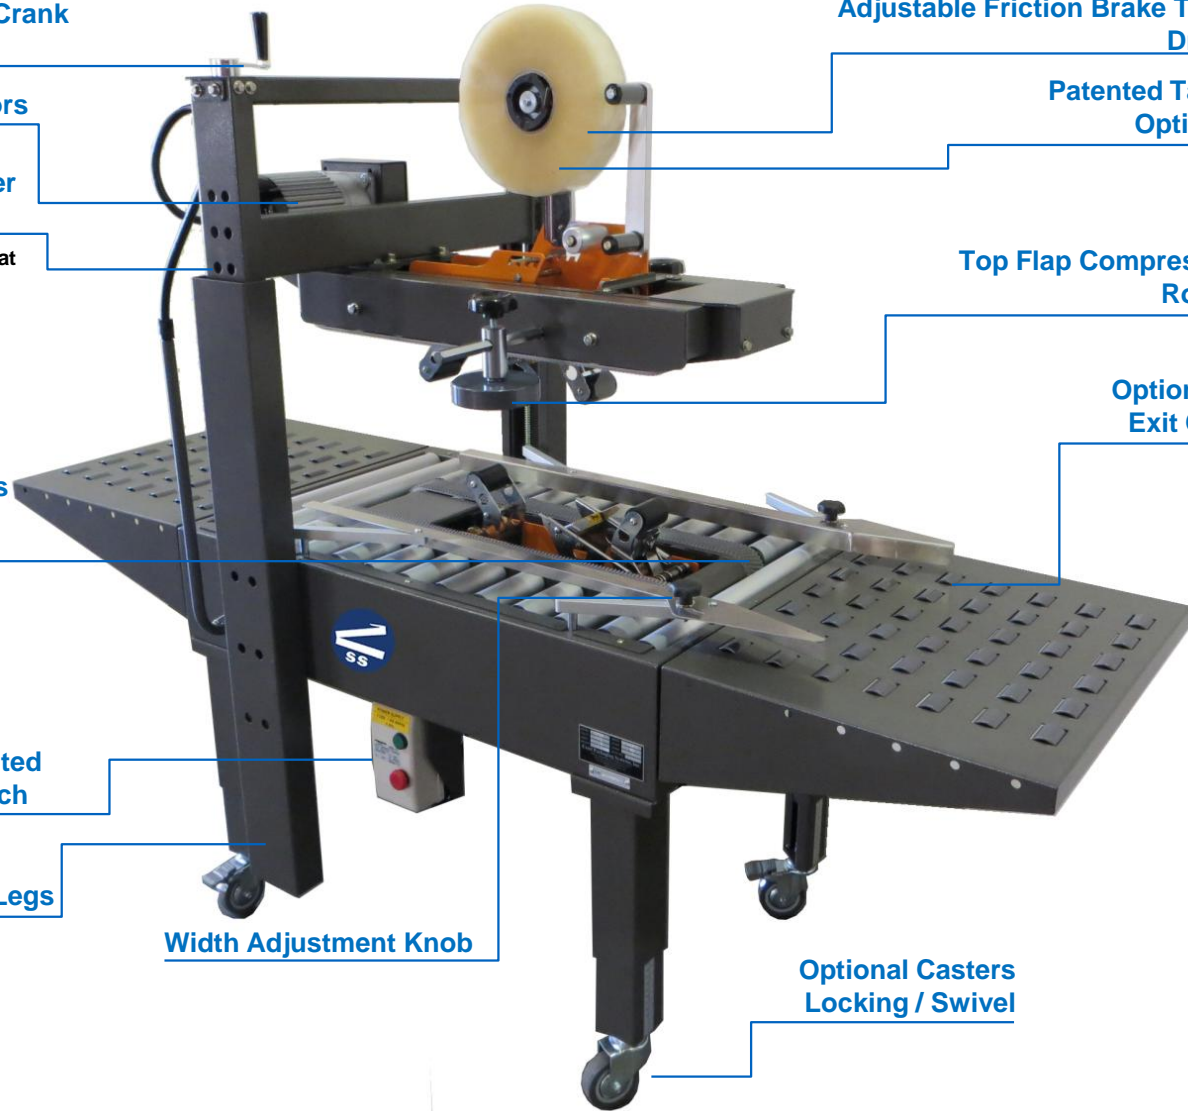

MyBinding.com
 5500 NE Moore Court
 Hillsboro, OR 97124

Toll Free: 1-800-944-4573
 Local: 503-640-5920