

# ***SealerSales HL-M810I Horizontal Dry Ink Coding Continuous Band Sealer***

Product Spec Sheet



*Provided by*

**MyBinding.com**  
*When Image Matters.*

Call Us at 1-800-944-4573

# Dry-Ink Coding Left Feed

## CONTINUOUS BAND SEALERS

**HL-M810** is suitable for sealing all types of thermoplastic materials and bags. This sealer can be used in a variety of fields such as the food, medical, and cosmetic industries. Can seal 20-30 6" poly bags in one minute. HL-M810 uses dry ink coding to print numbers or letters on the seal line.

### FEATURES

- Durable stainless steel construction
- Easy to operate – minimal operator training
- Fast warm up time
- Solid state digital temperature controller to maintain seal bars at proper temperature for consistent seal quality
- Fully adjustable conveyor (conveyor height and depth in relation to seal bars can be adjusted)
- Motorized rubber conveyor for speed control
- Knurled pressure rolls with variable pressure adjustment
- Sealing method – constant/direct heat accompanied with a pair each of cooling and heating blocks
- Unit feeds left to right (For right to left feed, see FRM-1120C and FRM-1010)
- Spare parts includes: PC Board, PTFE belt, wheel belt, fuse, motor brush, heating element, silica gel ring, silicone pin, and type set

### OPTIONS

- Stainless steel stand for horizontal models
- Dry ink coding – font size – 10.5PT (standard is 18.5PT)


SPECIFICATIONS	
POWER	110V / 60Hz
MOTOR POWER	50W
SEALING SPEED	0-472 INCHES/MINUTE
SEAL WIDTH	8MM
TEMPERATURE RANGE	0-300°C
SEALING POWER	300 X 2
CONVEYOR SIZE	37" x 6"
MAX CONVEYOR LOAD	6.6LBS
BAG SIZE (FILLED)- VERTICAL	MINIMUM - 7 7/8" MAXIMUM – 12"
CHARACTER SIZE	TWO TYPES AVAILABLE R-TYPE: PT 18PT – 2 LINES OPTION: PT 10.5 – 3 LINES
PRINTING HEATING POWER (W)	40 x 2
PRINTING OPTIONS	20 CHARACTERS/LINE
DIMENSIONS	37" x 16" x 17"
WEIGHT	HORIZONTAL -85lbs VERTICAL – 95lbs



HL-M810I



HL-M810II

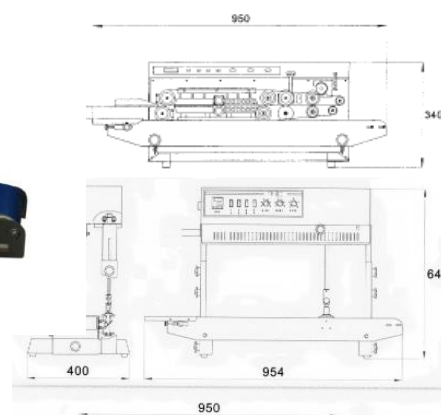

# Dry-Ink Coding Left Feed

## CONTINUOUS BAND SEALERS

HL-M810II - Vertical



HL-M810I -Horizontal



Control Panel

