

***SealerSales W-300DAT***  
***12" Table-Top Direct Heat Sealer***  
***w/ PTFE Coated Meshed Seal***

Product Spec Sheet



*Provided by*

**MyBinding.com**  
*When Image Matters.*


Call Us at 1-800-944-4573

# W-Series Direct Heat TABLE TOP SEALERS

**W-300DAT (S) Table-Top Direct Heat Sealers** seal many different types of thermoplastic materials including: coated aluminum foil, Kraft paper, cellophane, polypropylene, poly-nylon, and other thicker materials. Please note: direct heat sealers cannot seal polyethylene.

Material up to 12" wide and 20mil total thickness can be sealed. The W-300DAT direct heat sealer seals with either a 15mm **meshed** (W-300DAT) or **serrated** (W-300DATS) seal. Sealer is equipped with a German manufactured thermocontroller for maintaining consistent temperature and an electronic timer control to adjust the sealing time. Once the settings are set, consistent seals can be maintained. Hands free sealing can be achieved by using the foot switch. Sealing bars are enclosed with heat resistant plastic bars for safer operation. Unit is also accompanied with a work table.

**Easy to operate:** Operation is very simple. Set the temperature on the thermo controller depending on the material to be sealed. (Note: Temperature on the dial is in Celsius, not Fahrenheit). Always start with the minimal setting and slowly increase temperature as needed. Set the timer setting for the length of the sealing time. When the ready light on the thermo controller turns green, insert the material between the two sealing bars. Activate the foot switch to start the sealing process.

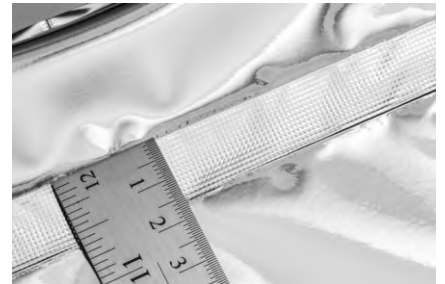

*Meshed Seal Example*



*Serrated Seal Example*

MODEL #	SEALING (L X W)	SEAL TYPE	POWER SUPPLY	TEMPERATURE RANGE	DIMENSIONS	WEIGHT
W-300DAT	12" x 15mm	MESHED	110V / 350W	0°C-300°C / 30°F-550°F	13" X 14" X 7" SHIPPING – 17" X 15" X 16"	38LBS
W-300DAT(S)	12" x 15mm	SERRATED	110V / 350W	0°C-300°C / 30°F-550°F	13" X 14" X 7" SHIPPING – 17" X 15" X 16"	38LBS