

GFP 865DH-3R 65" Dual Heat Wide Format Roll Laminator

Product Spec Sheet



Provided by

MyBinding.com
When Image Matters.

Call Us at 1-800-944-4573



Gfp **Graphic Finishing**
partners

Where Finishing Comes First.

Gfp 865DH-4R

Professional Dual Heat Laminator

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 865DH-4R delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

ULTIMATE FLEXIBILITY

Dual heat for thermal & cold apps

PROFESSIONAL FEATURES

Produce Professional results

FAST ROLL CHANGES

Front/Rear Swing-out shafts

EASY LOADING

3" Quick-Grip Swing-out Shafts

INDUSTRIAL DESIGN

Years of maintenance-free service




laminating • mounting • encapsulating

Our most flexible, cost-effective laminator yet

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.




- Labor saving swing-out supply shafts
- Drop-in Quick-Grip rewind shafts
- Photoelectric eye for operator safety
- Independent top and bottom heaters
- Web clutch adjustment for output quality
- Motorized rear rewind
- Swing up feed table and 38" output height

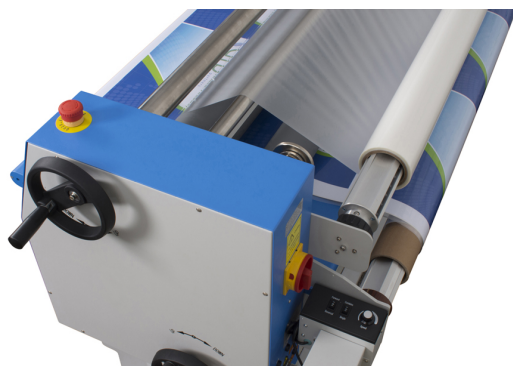

Motorized rear rewind for roll-to-roll applications included.

Media Alignment Disks prevent media supply roll from telescoping during operation.

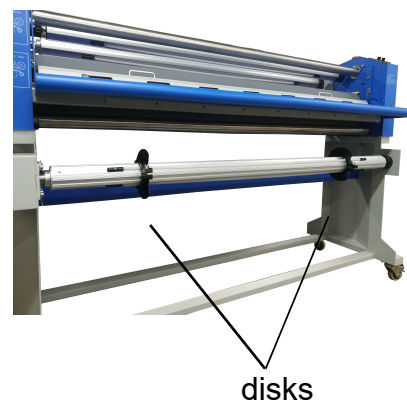

disks

Rugged Design
Professional Quality
Proven Performance
Economically Priced

865DH-4R

APPLICATIONS

Signs
Posters
POP Displays
Trade show displays
Dry-erase boards
Graphic mounting
Photo mounting
Floor graphics
Window graphics
Vehicle graphics

cTUVus
Safety
Approval



Warranty:

1 year parts & labor.
Installation is included.

<i>Laminating Width</i>	65"
<i>Roller Diameter</i>	5"
<i>Roller Gap</i>	1"
<i>Main rollers</i>	Silicone
<i>Supply roll diameter(max)</i>	16" bottom, 8" top
<i>Film shafts</i>	3" aluminum Quick-Grip
<i>Rear rewind</i>	Included
<i>Max. temperature</i>	266°F
<i>Heat method</i>	Quartz heater
<i>Film thickness</i>	1.5 - 10mil
<i>Laminating speed</i>	0-13 ft/min
<i>Drive motor</i>	DC geared motor
<i>Pressure Adjustment</i>	Dual hand wheels
<i>Roller heating</i>	Top & Bottom
<i>Power Supply</i>	240v 60HZ Single phase 24A
<i>Power Consumption</i>	Max. 5760W
<i>Net Weight w/ stand</i>	767 lbs.
<i>Dimensions</i>	87" x 34" x 49"
<i>Machine shipping</i>	893 lbs. 90 x 38" x 33"
<i>Stand shipping</i>	134 lbs. 79 x 33" x 15"



9620 NE Tanasbourne, Dr. Suite 250, Hillsboro, OR 97124

sales@mybinding.com

1-800-944-4573