

Luxor RECLAIM Clear Acrylic 24" x 30" Freestanding Counter Sneeze Guard

Spec Sheet



Provided by
MyBinding.com
When Image Matters.

Call Us at 1-800-944-4573

RECLAIM® ACRYLIC COUNTER SNEEZE GUARD


Freestanding

Product Specifications

Item Number	DIVCU
Panel Material	Clear acrylic
Panel Thickness	1/4"
Bracket Material	Brushed aluminum
Bracket Type	Edge clamp (tightened with built-in screws)
Cutout Size	16" W x 6" H
Required tools for assembly	Philips head screwdriver
Includes	1 main panel, 2 side panels, and 4 edge clamps
Weights and Dimensions	See chart below
Cleaning	Clean with a microfiber cloth and a solution of mild dish soap and water or commercial plastic cleaners rated safe for use on acrylics.*
Marker Compatibility	Water-soluble dry-erase markers only**
Flammability Rating	UL 94, HB
Warranty	5 year limited warranty

**To Order, Call Your Sales Representative
or 800-323-4656**

DIVCU – SPEC SHEET

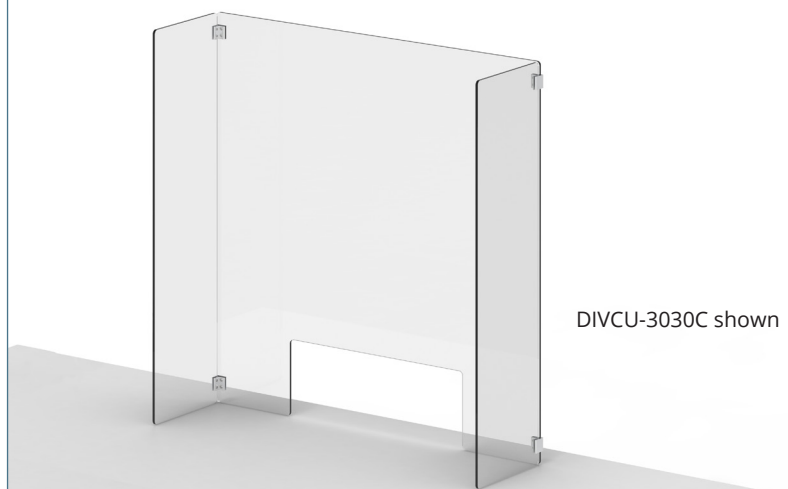


DIVCU-3030C shown



DIVCU-2430C



DIVCU-3030C



DIVCU-CLAMP

Product #	Product Description	Height	Width	Panel Color	# of Clamps	Shipping Method	Box Length	Box Width	Box Height	Shipping Weight	Panel Weight
DIVCU-2430C	24" x 30" Clear Acrylic Divider w/ Cutout w/ side 8" x 30" Panels	30"	24"	Clear	4	Ground	32"	26"	1"	15 lbs.	9.4 lbs.
DIVCU-3030C	30" x 30" Clear Acrylic Divider w/ Cutout w/ side 8" x 30" Panels		30"				33"	32"	1"	18 lbs.	10.9 lbs.

IMPORTANT WARNINGS:

***Proper Care and Cleaning of Acrylic – PLEASE READ BEFORE INSTALLING:** Acrylic sheeting can be damaged by harsh solvents and cleaners. Only use cleaning products labeled "commercial plastic cleaners", or mild soap and water to remove dirt and debris. When applying the cleaner, use a non-abrasive lint-free or microfiber cloth that won't scratch the surface. Never use products containing ammonia, acetone, carbon tetrachloride, scouring compounds, alcohol, bleach, aromatics, or gasoline. Chemical glass cleaners (even if they are environmentally friendly, organic, or non-scented) are also not to be used. All solvents need to be wiped clean with fresh water and blotted dry to reduce and prevent water spotting. Failure to adhere to the above guidelines can cause yellowing, cracks, and scratches in acrylic sheeting and may give the surface a frosted appearance. It will also void the Limited Warranty – our Limited Warranty does not apply to any damage caused by or the result of improper cleaning, handling, installation, operation, maintenance, pressure washing, accident, fire, natural disaster, explosion, abuse, vandalism, chlorine, chemicals from sprinkler systems, or other external forces. This warranty shall be null and void if any harmful solvents are used to clean.

****Use of Dry-Erase Markers:** Water-soluble dry-erase markers are safe for use on these acrylic panels. Other forms of dry-erase markers are not recommended because they will be difficult to erase and could possibly leave stains and ghosting.