

Luxor RECLAIM Clear Acrylic 30'' x 30'' Freestanding Counter Sneeze Guard

Spec Sheet



Provided by
MyBinding.com
When Image Matters.

Call Us at 1-800-944-4573


RECLAIM® ACRYLIC COUNTER SNEEZE GUARD

Freestanding

Product Specifications

| | |
|-----------------------------|--|
| Item Number | DIVCU |
| Panel Material | Clear acrylic |
| Panel Thickness | 1/4" |
| Bracket Material | Brushed aluminum |
| Bracket Type | Edge clamp (tightened with built-in screws) |
| Cutout Size | 16" W x 6" H |
| Required tools for assembly | Philips head screwdriver |
| Includes | 1 main panel, 2 side panels, and 4 edge clamps |
| Weights and Dimensions | See chart below |
| Cleaning | Clean with a microfiber cloth and a solution of mild dish soap and water or commercial plastic cleaners rated safe for use on acrylics.* |
| Marker Compatibility | Water-soluble dry-erase markers only** |
| Flammability Rating | UL 94, HB |
| Warranty | 5 year limited warranty |

DIVCU – SPEC SHEET

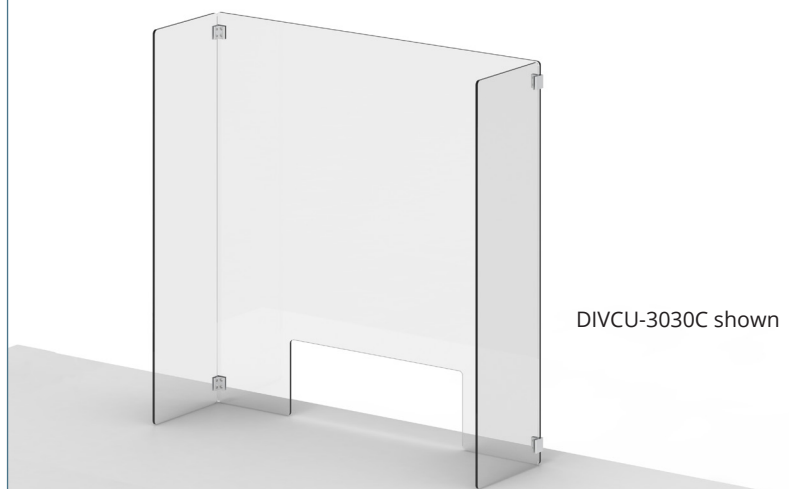


DIVCU-3030C shown



DIVCU-2430C



DIVCU-3030C



DIVCU-CLAMP

| Product # | Product Description | Height | Width | Panel Color | # of Clamps | Shipping Method | Box Length | Box Width | Box Height | Shipping Weight | Panel Weight |
|-------------|---|--------|-------|-------------|-------------|-----------------|------------|-----------|------------|-----------------|--------------|
| DIVCU-2430C | 24" x 30" Clear Acrylic Divider w/ Cutout w/ side 8" x 30" Panels | 30" | 24" | Clear | 4 | Ground | 32" | 26" | 1" | 15 lbs. | 9.4 lbs. |
| DIVCU-3030C | 30" x 30" Clear Acrylic Divider w/ Cutout w/ side 8" x 30" Panels | | 30" | | | | 33" | 32" | 1" | 18 lbs. | 10.9 lbs. |

IMPORTANT WARNINGS:

***Proper Care and Cleaning of Acrylic – PLEASE READ BEFORE INSTALLING:** Acrylic sheeting can be damaged by harsh solvents and cleaners. Only use cleaning products labeled "commercial plastic cleaners", or mild soap and water to remove dirt and debris. When applying the cleaner, use a non-abrasive lint-free or microfiber cloth that won't scratch the surface. Never use products containing ammonia, acetone, carbon tetrachloride, scouring compounds, alcohol, bleach, aromatics, or gasoline. Chemical glass cleaners (even if they are environmentally friendly, organic, or non-scented) are also not to be used. All solvents need to be wiped clean with fresh water and blotted dry to reduce and prevent water spotting. Failure to adhere to the above guidelines can cause yellowing, cracks, and scratches in acrylic sheeting and may give the surface a frosted appearance. It will also void the Limited Warranty – our Limited Warranty does not apply to any damage caused by or the result of improper cleaning, handling, installation, operation, maintenance, pressure washing, accident, fire, natural disaster, explosion, abuse, vandalism, chlorine, chemicals from sprinkler systems, or other external forces. This warranty shall be null and void if any harmful solvents are used to clean.

****Use of Dry-Erase Markers:** Water-soluble dry-erase markers are safe for use on these acrylic panels. Other forms of dry-erase markers are not recommended because they will be difficult to erase and could possibly leave stains and ghosting.