


PPG Side Seal Systems

designed to increase productivity with the simplest setup and operation

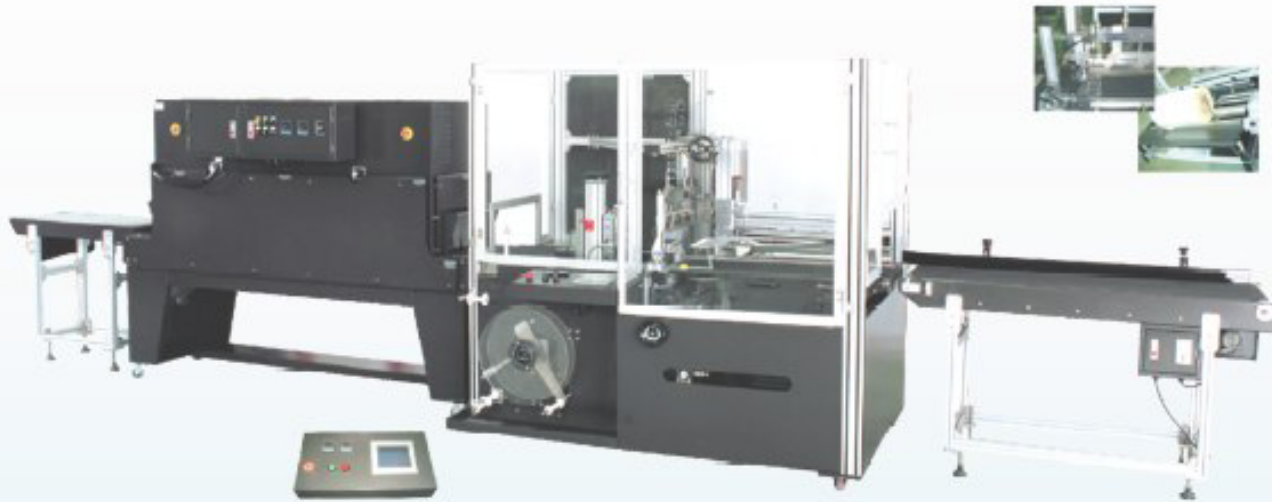

The picture above displays our side seal system with high speed tunnel PPG 1808-72 and optimal in & out-feed conveyors

Model	PPG 5022	PPG 7522	PPG 10022
Machine Type	Intermittent motion		
Controls	PLC/Touch screen		
Sealing Width	19.5"	29.5"	39"
Max. Product Width	17.5"	27.5"	37"
Max. Product Height	8.6"		
Film CF Width	25"	33"	45"
Film Type	Most commercial grade Polyolefin, PVC, LDPE		
Cross Seal Type	Hot Knife		
Conveyor Speed	100 feet/min		
Production Speed	Up to 60 PPM	Up to 35 PPM	Up to 25 PPM
Pneumatic	5-8 CFM @ 85 PSI		
Electrical	220V 3ph – 10 Amps		220V 3ph – 15 Amps
Machine Weight	1500 lbs	1800 lbs	2000 lbs

- Separate cut and seal process eliminates film build-up. No cleaning required.
- Handles infinite product lengths.
- Positive cut and seal process is ideal for polyolefin and PVC films.
- Handles wide temperature and speed ranges.
- One-step temperature set-up. No pressure, dwell, angle adjustments needed.
- Sealing bar controlled electronically (not a pneumatic system)

Programmable Logic Controller

- Color touch-screen control panel with password protection.
- Store and recall set-up parameters.