# Best-Rite 2' x 3' Deluxe Magne-Rite Dry-Erase Markerboard

**Instruction Manual** 



Call Us at 1-800-944-4573



### Which board assembly instructions should you use?

### Use **L-Clip** instructions for...

**ABC Trim** 

**Aluminum Trim** 

**Deluxe Wood Trim** 

48 Trim

### Use **Z-Clip** instructions for...

Ultra Trim

**Presidential Trim** 

31 Trim

**Euro Trim** 

Scroll down for instructions.

#### **Z Clip Install Instructions**



Determine board location. Measure from floor to the top edge of board. Mark with pencil line the corner location. Measure down from top edge of board 3/4", and draw line as shown. Locate stud near each end of board and drill pilot hole along line

using 1/8" drill bit.



Note:

Install Masonry Anchors (D) into 1/4" Diameter predrill holes for masonry walls.

Install Drywall Anchors (E) into 1/4" Diameter predrill holes for sheet rock walls.



E



Attach Z-Hangers (E) using Long Screws (A) as shown.





Lift and remove board from the Z-Hangers. Measure up from bottom line of board 1-1/8", and draw line as shown. Locate stud near each end of board and drill pilot hole along line using 1/8" drill bit.





Secure 2 bottom brackets (F) to the wall using 2 long screws (A) as shown. Hang board on the Z-Hangers (E).









#### L Clip Install Instructions



1 Determine board location. Measure from floor to the bottom edge of board. Mark with pencil line the corner location. Measure up from bottom edge of board 1-1/4" and draw line as shown. Locate stud near each end of board and drill pilot holes along line using 1/8" drill bit. See diagram below.









3 Set board on the Angle Brackets. Draw line along top edge of board.



Draw line





5 Secure top Angle Brackets (A) to the wall using long screws (B) as shown. Follow diagram in Step 1. Set board on the bottom angle brackets.











L Clip Install\_12-12-14








## **Attention**



Please read and follow these instructions! Failure to follow these instructions will void your warranty and could result in board failure and possible injury.

- 1. Always use the correct supplied mounting hardware for the type wall your board will be mounted on.
- 2. Use the correct stated predrill for the type anchor you will be using.
- 3. The Angle Brackets and Z Clips MUST be installed according to the layout and spacing as shown below.

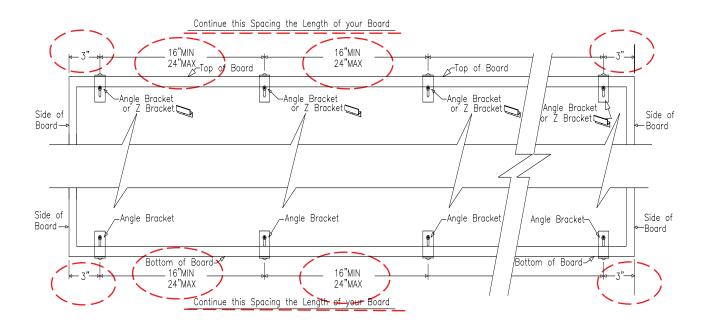

NOTE: For more information, please refer to our web-site: www.partsandinstructions.com

### **Proper L-Clip Layout**

