Best-Rite 1.5' x 2' Green-Rite Porcelain Whiteboard with Black Presidential Trim - E2H2PA-T1

Product Spec Sheet



Call Us at 1-800-944-4573

Green-Rite® Whiteboard

with Black Presidential Trim












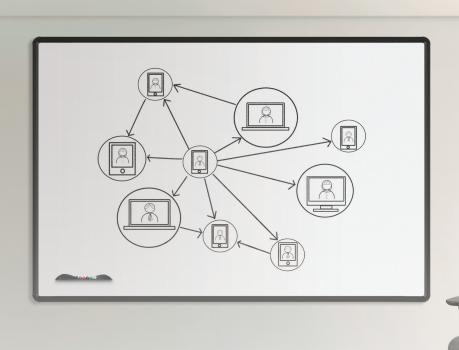

Green-Rite® Whiteboard - Black Presidential Trim

- Green-Rite® is an environmentally responsible, virtually indestructible magnetic porcelain steel dry
 erase surface that provides superior writability, color contrast with markers.
- Featured with black Presidential trim. Lengths of anodized aluminum are joined with curved injection-molded plastic corners for an upscale, modern board. Magnetic accessory tray included.
- Class A Fire Rated board. A full test report copy is available upon request.
- Has achieved GREENGUARD GOLD Certification. Made in the USA. Fifty year limited warranty. TAA
 compliant.
- For interactive projectors with strict flatness requirements, we recommend the Interactive Projector Board or Projection Whiteboard with Polyvision® duo Surface, providing guaranteed results for projectability, erasability and durability.

Part No.	Product Dimensions	Ship Wt.
Green-Rite Whiteboard - Black Presidential Trim		
E2H2PA-T1*	1.5'H x 2'W	8 lbs
E2H2PB-T1*	2'H x 3'W	15 lbs
E2H2PC-T1**	3'H x 4'W	25 lbs
E2H2PD-T1	4'H x 4'W	40 lbs
E2H2PF-T1	4'H x 5'W	48 lbs
E2H2PG-T1	4'H x 6'W	55 lbs
E2H2PH-T1	4'H x 8'W	75 lbs

*Ships UPS **Ships UPS 0S1

Shipping weights are listed on a per item basis and may vary based on quantities ordered. All boards listed as 3'H x 4'W actually measure 33.75'H x 48'W due to shipping restrictions.

Green-Rite® Technical Information

- Multipurpose magnetic surface with superior writability and erasability for dry erase markers. Superior contrast and reduced surface light distortion minimizes glare for optimum eye comfort.
- A precisely balanced porcelain enamel ground coat is furnace-fused to both sides of 28 gauge (standard) or 24 gauge (custom) steel.
- The first furnace fuses a ground coat of enamel that is heat-softened at approximately 1450° F. The second furnace firing fuses a coat of enamel to the ground coat enamel. Color Fusion ceramic top coat is applied providing the desired surface color.
- A fade resistant waterproof resin glue bonds the porcelain to a moisture-resistant core and .005" polyester foil backer sheet. Also available with upgraded sheet aluminum backer. Custom sizes are available.



WWW.MYBINDING.COM