Luxor Rotating Adjustable Height Flat Panel Stand - FP3500

Instruction Manual



Call Us at 1-800-944-4573

Stand Instructions

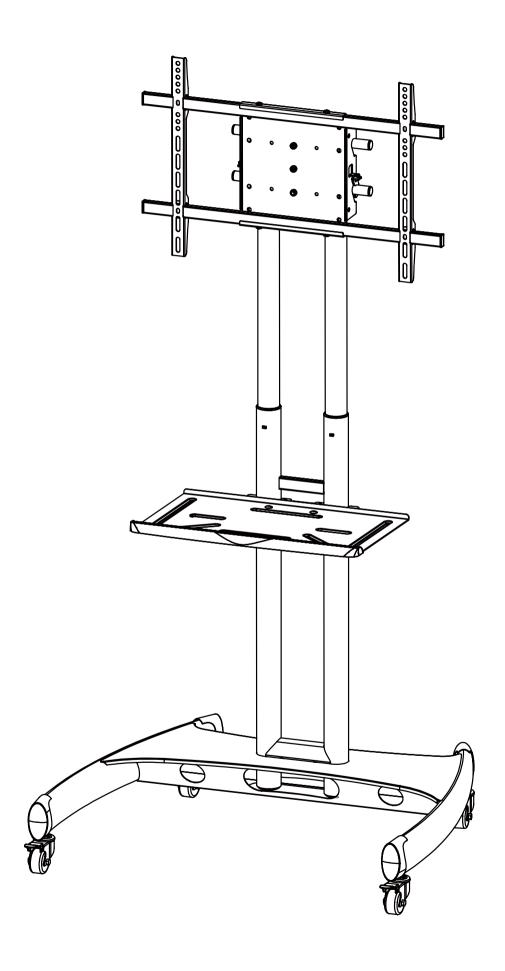


Table of Contents

Table of Contents and Warnings	2
Part List	3
Assembly and Installation	
1. Adjust upper and lower poles	4
2. Attaching to the base assembly	5
3. Installing the Media Shelf	6
4. Install steel cross rods	7
5. Install the TV	8
6. Install mount to frame	9
7. Adjusting the mount	10

Tools Required

Phillips Screwdriver Tape Measure Wrench



WARNING!

Severe personal injury and property damage can result from improper installation. Read instructions carefully before beginning.

Assistance is required when installing the TV.

If you do not understand the instructions or have any concerns please contact a qualified local installer.


Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, contact your local dealer.

This product fits most 40" - 60" flat panel displays; maximum eight for the disply is 100 lbs. Do not use this product for anything other than what it was originally designed.


This product contains moving parts, please use caution.

The manufacturer disclaims any liability for the modifications, improper installation, and installation exceeding maxium weight capacity. The manufacturer will not be liable for any damages arising out of the use of, or inability to use the product.

Visual Guides

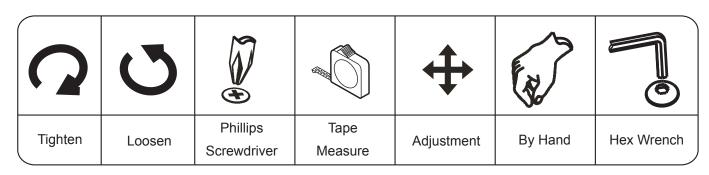


Parts List

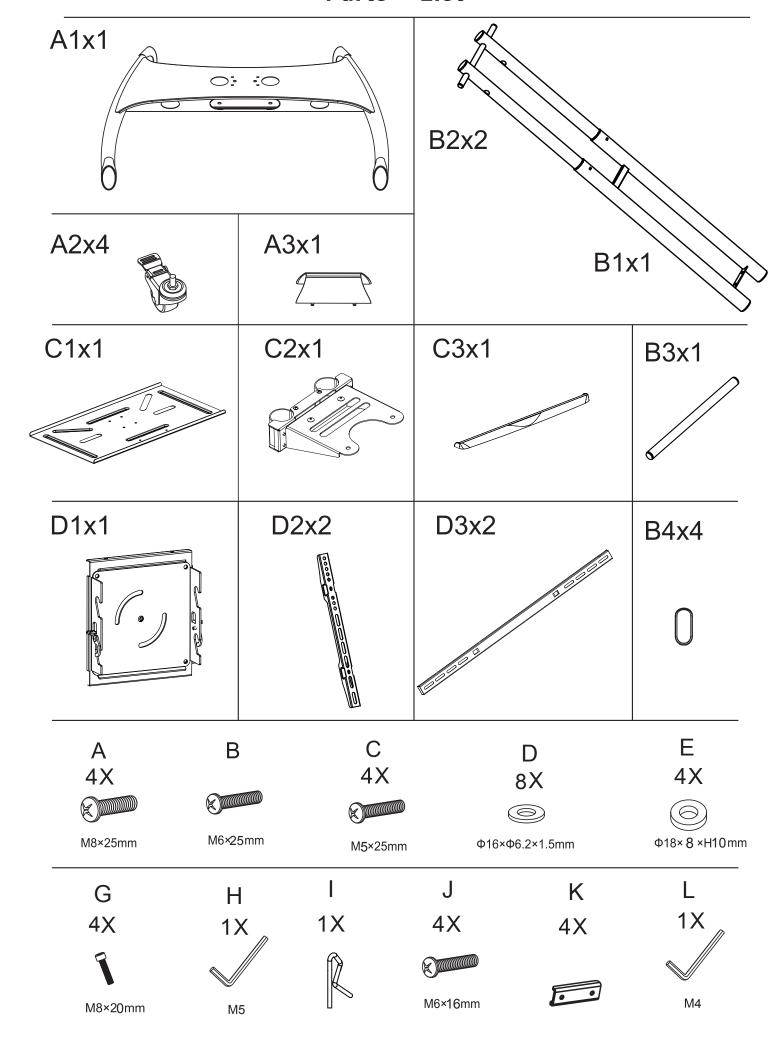

1 Adjust upper and lower poles


- Locate the spring plungers inside the bottom grommet hole of pole B1 (If your unit has B3 cross bar pre-installed remove prior). Starting with the right side poleB2, push the spring plunger down and pull B2 up slightly and twist it slightly so that the spring plunger remains offset. This will make adjusting the pole easier. (figure 1)
- Hold the poles B1 & B2 with your hands and use your left foot on the cross bridge of B1 for stability Pull B2 upward until you reach your desired height Twist B2 so that the spring plunger locks into the nearest spring plunger hole. (figure 2)
- Repeat the same steps for the left side pole B2 but use your right foot for stability insteadAlign poles B2 and lock the spring plunger into place. (figure 3)

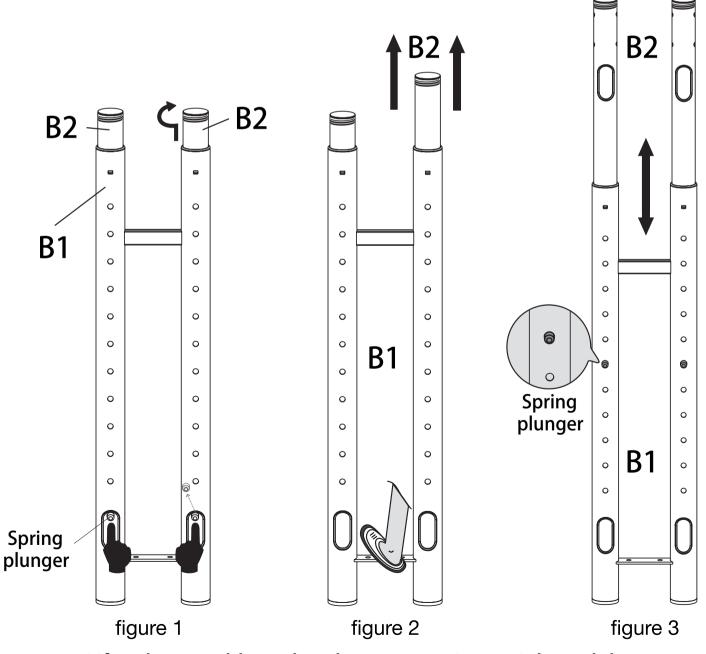

Lift pole assembly so that the part remains upright and the cable management holes are facing toward you.


2 Attaching to the base assembly

- 1 Thread casters A2 into the bottom of base A1. Make sure all casters a re locked to prevent movement during installation
- With allen wrenchM attach lower poles B1 to base A1 with screw G. First through the bottom of baseA1, then through the top of baseA.
- After screws G are firmly fastened, push down the screw cover A3 until it locks into place

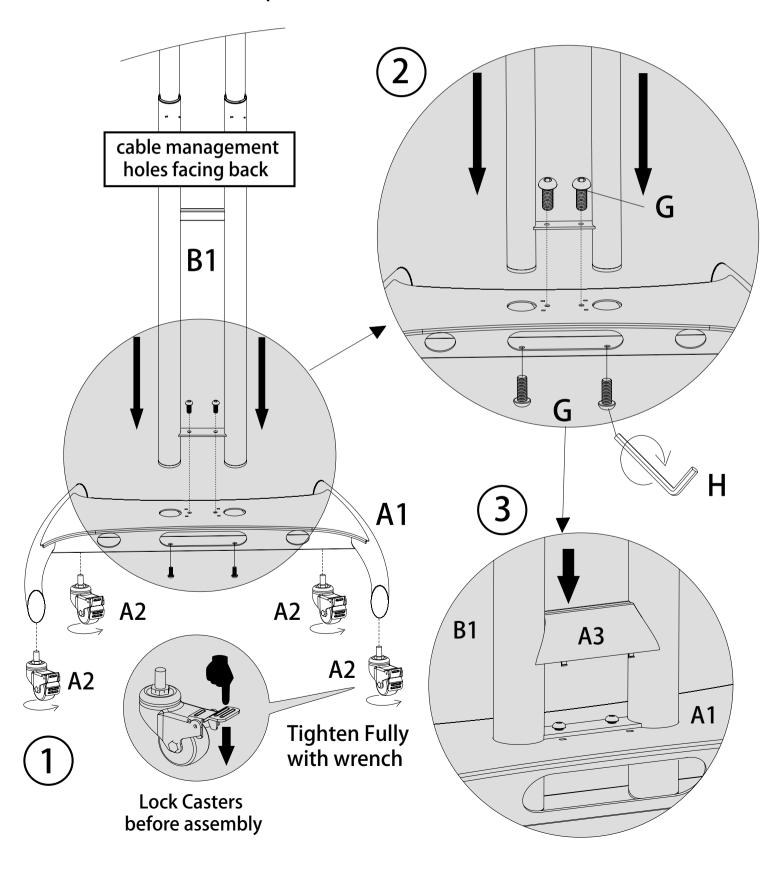


3 Install the media shelf


Remove Pre-Installed Screws

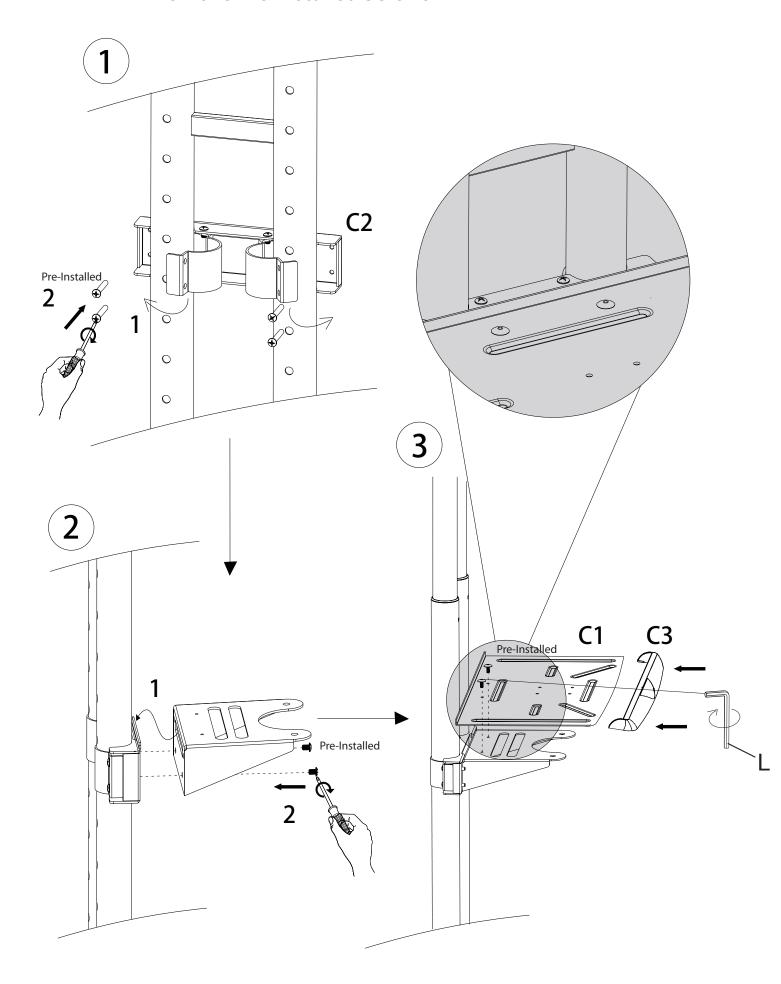


4 Install steel cross rods

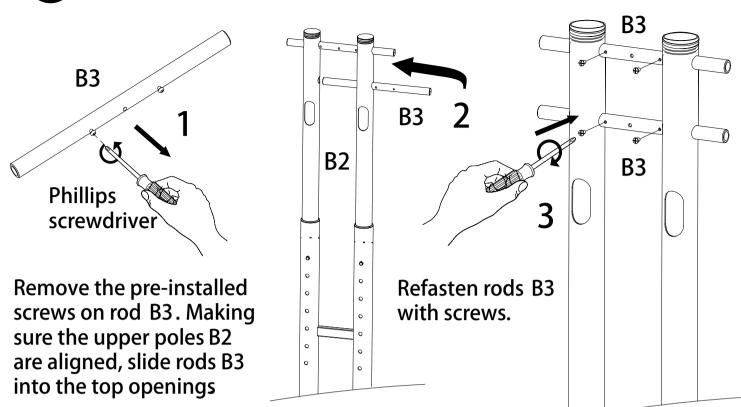


4a Height adjustment

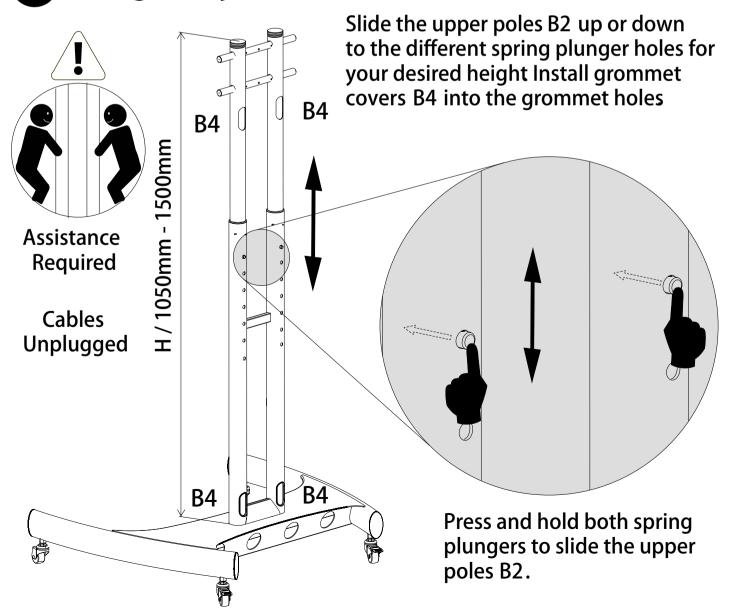

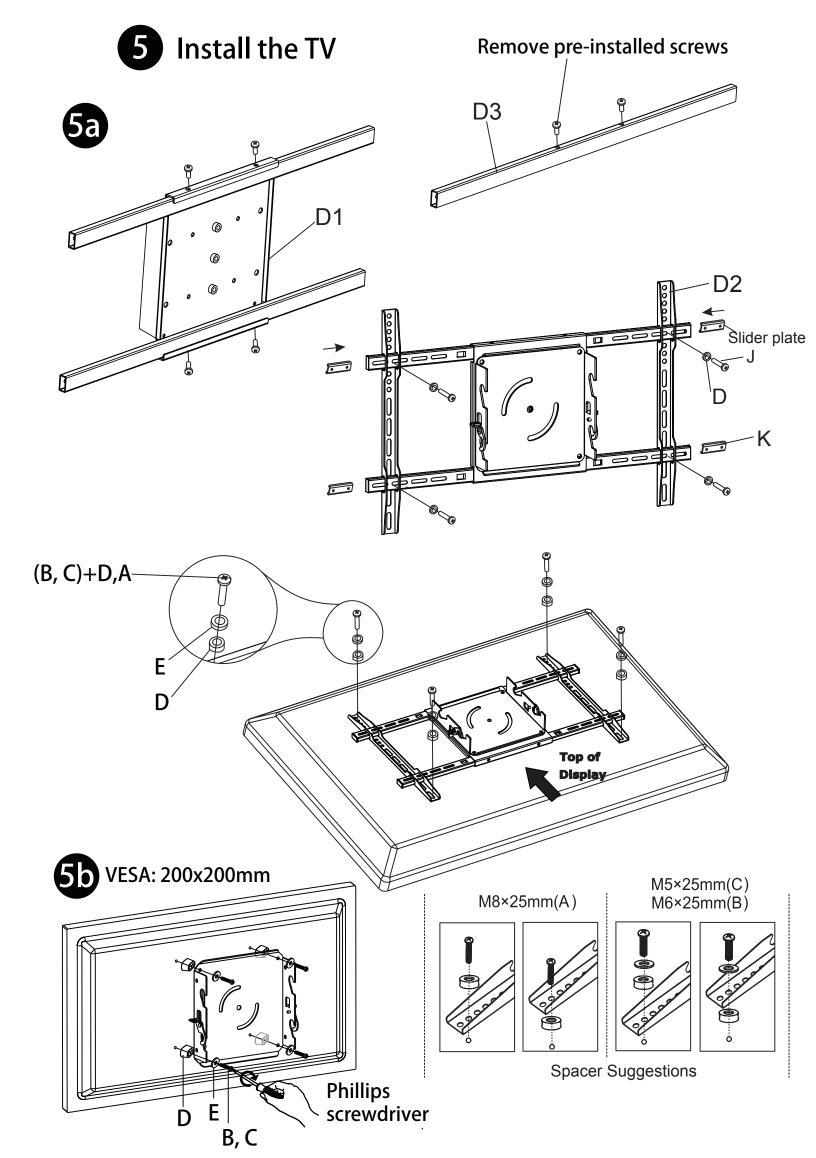

6 Install mount to frame

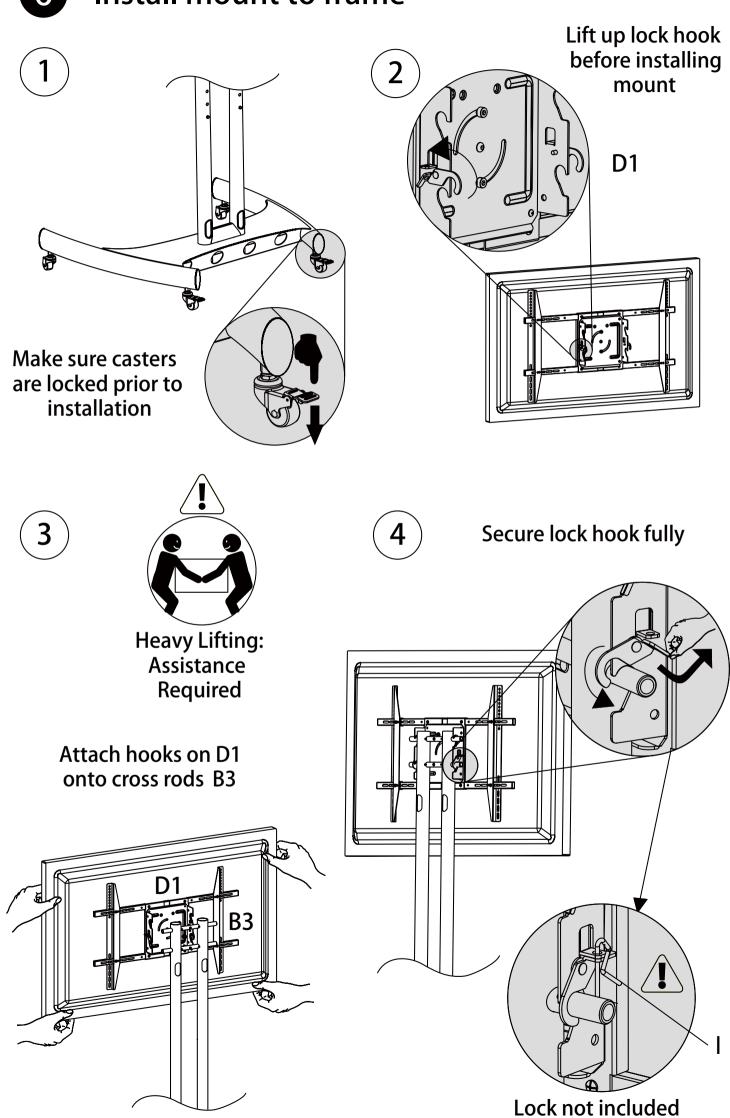

7 Adjusting the mount

